
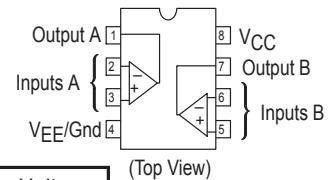


Single Supply Dual Operational Amplifiers

KM358

■ Features

- Short Circuit Protected Outputs
- True Differential Input Stage
- Single Supply Operation: 3.0 V to 32 V
- Low Input Bias Currents
- Internally Compensated
- Common Mode Range Extends to Negative Supply
- Single and Split Supply Operation

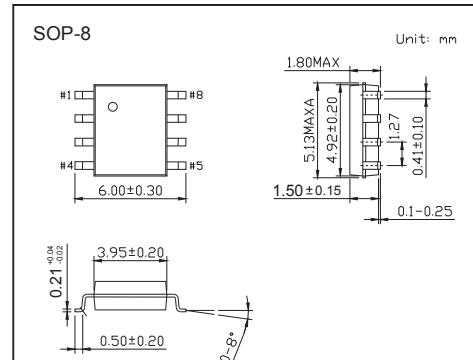


■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Power Supply Voltages			
Single Supply	V _{CC}	32	Vdc
Split Supplies	V _{CC} , V _{EE}	± 16	
Input Differential Voltage Range *1	V _{IDR}	± 32	Vdc
Input Common Mode Voltage Range *2	V _{ICR}	-0.3 to 32	Vdc
Output Short Circuit Duration	t _{sc}	Continuous	
Junction Temperature	T _J	150	°C
Thermal Resistance, Junction-to-Air	R _{θJA}	238	°C/W
Storage Temperature Range	T _{stg}	-55 to +125	°C
Operating Ambient Temperature Range	T _A	0 to +70	°C

*1 Split Power Supplies.

*2 For supply voltages less than 32 V the absolute maximum input voltage is equal to the supply voltage.

■ Representative Schematic Diagram (One-Half of Circuit Shown)

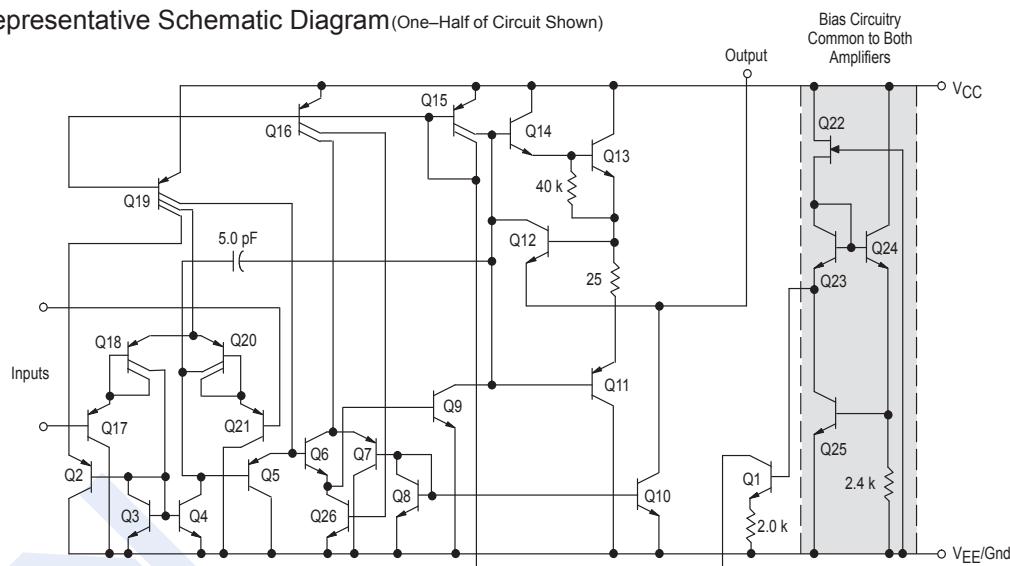

KM358

■ Electrical Characteristics $T_a = 25^\circ\text{C}$ ($V_{cc} = 5.0 \text{ V}$, $V_{EE} = \text{Gnd}$, $T_a = 25^\circ\text{C}$, unless otherwise noted.)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Input Offset Voltage	V_{IO}	$V_{cc} = 5.0 \text{ V to } 30 \text{ V}$, $V_{ic} = 0 \text{ V to } V_{cc} - 1.7 \text{ V}$				mV	
		$V_o \approx 1.4 \text{ V}$, $R_s = 0\Omega$					
		$T_a = 25^\circ\text{C}$		2.0	7.0		
		$T_a = T_{high} * 5$			9.0		
Average Temperature Coefficient of Input Offset Voltage	$\Delta V_{IO}/\Delta T$	$T_a = T_{high} \text{ to } T_{low} * 5$	7.0			$\mu\text{V}/^\circ\text{C}$	
Input Offset Current	I_{IO}	$T_a = T_{high} \text{ to } T_{low} * 5$	5.0	50	nA		
Input Bias Current	I_{IB}	$T_a = T_{high} \text{ to } T_{low} * 5$	-45	-250			
				-50	-500		
Average Temperature Coefficient of Input Offset Current	$\Delta V_{IO}/\Delta T$	$T_a = T_{high} \text{ to } T_{low} * 5$		10		$\text{pA}/^\circ\text{C}$	
Input Common Mode Voltage Range *6	V_{ICR}	$V_{cc} = 30 \text{ V}$	0		28.3	V	
		$V_{cc} = 30 \text{ V}$, $T_a = T_{high} \text{ to } T_{low}$	0		28		
Differential Input Voltage Range	V_{IDR}				V_{cc}	V	
Large Signal Open Loop Voltage Gain	A_{VOL}	$R_L = 2.0 \text{ k}\Omega$ $V_{cc} = 15 \text{ V}$, For Large V_o Swing, $T_a = T_{high} \text{ to } T_{low}$	25	100		V/mV	
			15				
Channel Separation	C_S	$1.0 \text{ kHz} \leq f \leq 20 \text{ kHz}$, Input Referenced		-120		dB	
Common Mode Rejection	CMR	$R_s \leq 10 \text{ k}\Omega$	65	70		dB	
Power Supply Rejection	PSR			65	100	dB	
Output Voltage-High Limit	V_{OH}	$T_a = T_{high} \text{ to } T_{low} * 5$				V	
		$V_{cc} = 5.0 \text{ V}$, $R_L = 2.0 \text{ k}\Omega$ $T_a = 25^\circ\text{C}$	3.3	3.5			
		$V_{cc} = 30 \text{ V}$, $R_L = 2.0 \text{ k}\Omega$	26				
		$V_{cc} = 30 \text{ V}$, $R_L = 10 \text{ k}\Omega$	27	28			
Output Voltage-Low Limit	V_{OL}	$V_{cc} = 5.0 \text{ V}$, $R_L = 10 \text{ k}\Omega$ $T_a = T_{high} \text{ to } T_{low} * 5$		5	20	mV	
Output Source Current	I_{O+}	$V_{ID} = +1.0 \text{ V}$, $V_{cc} = 15 \text{ V}$	20	40		mA	
Output Sink Current	I_{O-}		10	20		mA	
			12	50		μA	
Output Short Circuit to Ground *7	I_{SC}			40	60	mA	
Power Supply Current (Total Device)	I_{CC}	$T_a = T_{high} \text{ to } T_{low} * 5$			1.5	3.0	mA
		$V_{cc} = 30 \text{ V}$, $V_o = 0 \text{ V}$, $R_L = \infty$			0.7	1.2	
		$V_{cc} = 5 \text{ V}$, $V_o = 0 \text{ V}$, $R_L = \infty$					

*5 $T_{low} = 0^\circ\text{C}$, $T_{high} = +70^\circ\text{C}$

*6 The input common mode voltage or either input signal voltage should not be allowed to go negative by more than 0.3 V.

The upper end of the common mode voltage range is $V_{cc} - 1.7 \text{ V}$.

*7 Short circuits from the output to VCC can cause excessive heating and eventual destruction.

Destructive dissipation can result from simultaneous shorts on all amplifiers.

■ Marking

Marking

358

KM358

■ Typical Characteristics

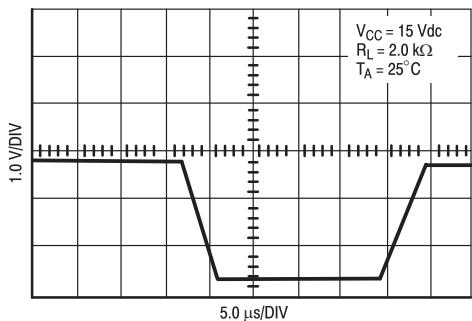


Figure 1. Large Signal Voltage Follower Response

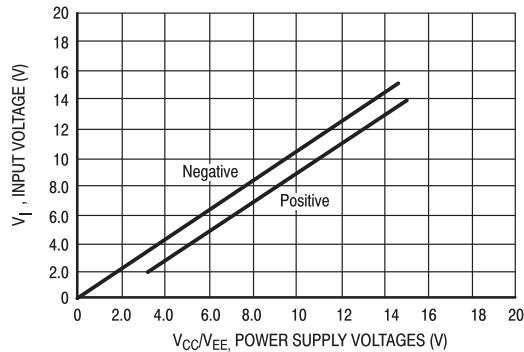


Figure 2. Input Voltage Range

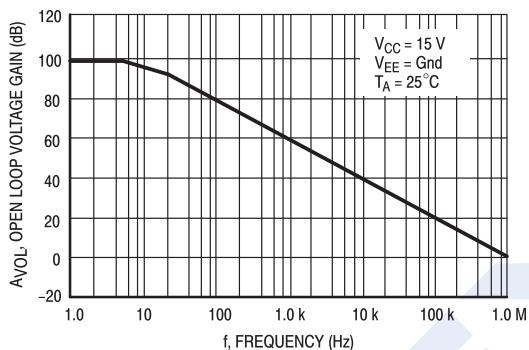


Figure 3. Large-Signal Open Loop Voltage Gain

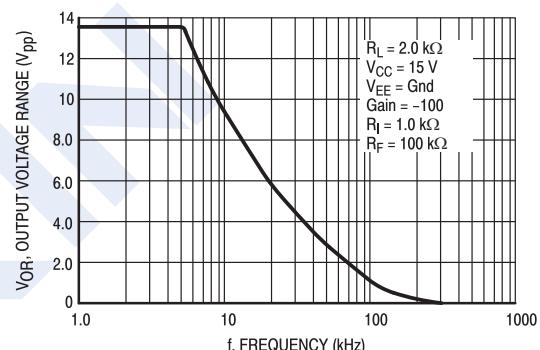


Figure 4. Large-Signal Frequency Response

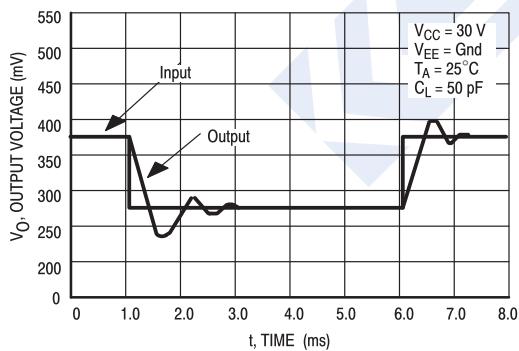


Figure 5. Small Signal Voltage Follower Pulse Response (Noninverting)

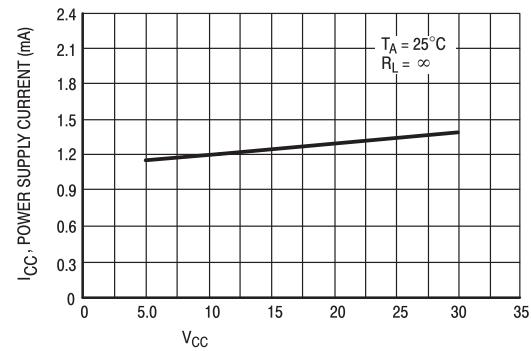


Figure 6. Power Supply Current versus Power Supply Voltage

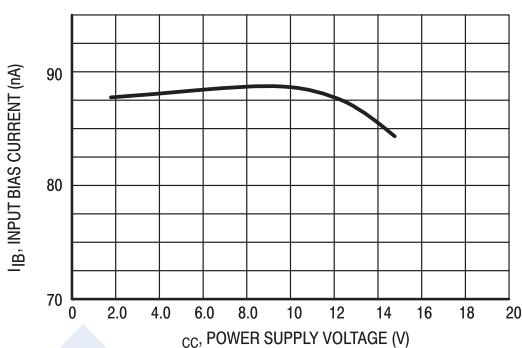


Figure 7. Input Bias Current versus Supply Voltage